



LEAD ALTERNATIVE

PRODUCT: Lead Alternative

DESCRIPTION: aluminium alternative to traditional lead flashing, with a protective anti-corrosion coating and an adhesive underside. Suitable for use in both flat and pitched roof projects. It is easy to mould and shape, and will adapt to various surfaces, providing a permanent bond to brickwork, roof tiles and other popular construction materials.

Available in a smooth or textured finish - both mimics the appearance of traditional lead.

FEATURES & BENEFITS:


- Available in four widths (150/ 300/ 450/ 600 mm)
- Zero re-sale value - eliminating theft and vandalism
- Cost effective alternative to traditional lead
- Waterproof
- UV resistant
- Extremely lightweight
- Durable.
- Malleable
- Easy to install
- Easily cut, no need for special tools
- Easily repaired
- Corrosion resistant

APPLICATIONS:

- Flat roofs
- Pitched roofs
- Abutments
- Chimneys
- Dormers

QUALITY STANDARDS:

- Conforms to BS 5534 : 2014
- Conforms to BS 8000-0 : 2014 and BS 8000-6 : 1990
- Satisfies all NHBC requirements

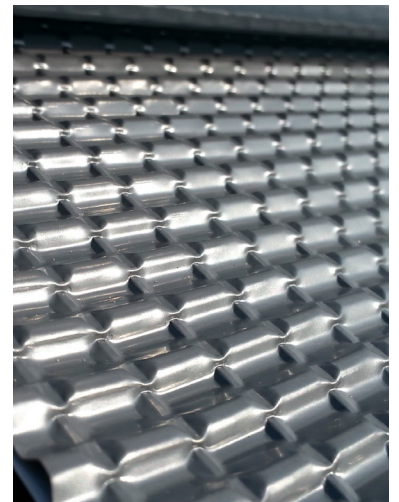

TEMPERATURE RESISTANCE: -40 to +90°C

WORKING TEMPERATURE: 5°C (minimum)

COLOUR: Grey

THICKNESS: 2mm

LIFE EXPECTANCY: 20 years (minimum)

ROLL LENGTH: 5m

SMOOTH FINISH

PRODUCT	SIZE	PALLET QUANTITY
EASYLEADR1505SMT	150MM x 5M	192
EASYLEADR3005SMT	300MM x 5M	96
EASYLEADR4505SMT	450MM x 5M	72
EASYLEADR6005SMT	600MM x 5M	48

TEXTURED FINISH

PRODUCT	SIZE	PALLET QUANTITY
EASYLEADR1505	150MM x 5M	192
EASYLEADR3005	300MM x 5M	96
EASYLEADR4505	450MM x 5M	72
EASYLEADR6005	600MM x 5M	48

	Value	Value	Value	Value
Roll width/mm	150	300	450	600
Roll weight/kilos	1.5	3	4.5	6
Roll length/mtrs	5mtr	5mtr	5mtr	5mtr